



# SMART CHOICE



The leading automotive parts distributor in Europe Issue 28

# Eure!Car®

CERTIFIED MASTERCLASSES

## Honda Civic 1.4 VTEC Hybrid

Attended a Eure!Car Certified Masterclass? You can sign up for the Eure!Car Technical Assistance Helpline  
See News on p 2 for more details



Book now for a Eure!Car Hybrid Certified Masterclass, starting in March - call your local branch\*  
\*at participating branches

Take a look at Eure!Car training in action at [vimeo.com/99565807](http://vimeo.com/99565807)



WORLD CLASS TRAINING  
**Unique to the IFA**

### Tyre Bay Offers

p 19 & 23

Quality products & packages for all budgets!



### SIMON'S SPECIALIST STUFF

p 8 & 9

Accelerator Pedal  
Ford Transit Mk7 2.2, 2.3, 2.4, 3.2 06>11

ONLY **£49.95**

(105-0001)

Hard-to-find, top quality excellent value parts!



### Buying Guide

p 15

Check out the benefits of a range of Smart Chargers





## Automatic Ignition Used Oil Heaters

- Clean combustion & high efficiency
- Large airflow blower fans
- Fan-only facility for summer ventilation
- Large capacity fuel tanks
- Burners adjustable to use heating oil/diesel
- Basic room thermostat is standard
- Optional digital thermostat/time control
- Compressed air supply required for burner
- Available at extra cost:
  - Flue Kit (from £269)
  - Motor/Pump Kits to connect to bulk fuel tank
  - Fire Valves, Magnetic Valves & High Pressure Filters for use with Pump Kits

|       | Price        | 5 Yr Lease pw |
|-------|--------------|---------------|
| SB40  | <b>£3599</b> | £19.14        |
| SB60  | <b>£3899</b> | £20.74        |
| SB80  | <b>£5499</b> | £29.25        |
| SB110 | <b>£5999</b> | £31.91        |

**FROM**  
**£3599**  
5 Year Lease £19.14 pw



| Model | Heat Capacity  | Fan Capacity            | Fuel Tank | Consumption | Compressed Air Displacement | Supply |
|-------|----------------|-------------------------|-----------|-------------|-----------------------------|--------|
| SB40  | 153,000 Btu/hr | 3200 m <sup>3</sup> /hr | 80 L      | 4.6 L/hr    | 1.0 - 1.3 CFM               | 230V   |
| SB60  | 204,000 Btu/hr | 4100 m <sup>3</sup> /hr | 80 L      | 6.0 L/hr    | 1.5 - 1.8 CFM               | 230V   |
| SB80  | 306,000 Btu/hr | 6200 m <sup>3</sup> /hr | 130 L     | 9.0 L/hr    | 2.0 - 2.6 CFM               | 400V+N |
| SB110 | 436,000 Btu/hr | 8100 m <sup>3</sup> /hr | 130 L     | 12.8 L/hr   | 3.0 - 3.6 CFM               | 400V+N |

See note regarding DEFRA changes to permits on opposite page

These units must be connected to a suitable flue system (min 1m above roof apex & 6m above ground level).

A full range of flue accessories is available. Complete flue kits include roof seal, fitting kit & two wall bands.

Stainless steel flue kits provide 6m ground clearance:

98.085.746 for SB40  
98.085.100 for SB60  
98.085.170 for SB80 & SB110

**Optional extras (additional cost):**

98.085.399 Motor/Pump Kit - for connection to bulk fuel tank with bottom outlet, gravity fed. Max distance 10m. (Pipework/ electric cable not included)  
98.087.161 Motor/Pump Kit - for connection to bulk fuel tank with top outlet &/or above 10m distance. (Pipework/electric cable not included)  
98.085.890 Digital Stat/Timer  
98.085.541 Main Fan Filter Kit (SB40 & SB60)  
98.085.542 Main Fan Filter Kit (SB80 & SB110)

## BSO Oil Fired Cabinet Heaters for connection to a bulk fuel tank

- Connect to a bulk fuel tank
- Use with 28 second fuel (paraffin/kerosene) or 35 second fuel (heating oil/diesel)
- 13 Models - heat outputs up to 381Kw (1.3M Btu/hr)
- Electro-zinc coated steel cabinet, inner heat shield skin, outer skin epoxy powder coat finished
- Centrifugal air circulation enhances life expectancy
- Models BSO30 to BSO85: direct drive fans, 1ph motor
- Model BSO120: 3ph motor & v-belt drive
- Combustion air inlet kit as standard
- Thermostat, time control, oil filter & fire valve
- Main fan filter kits available for dusty/hazardous places
- Extra cost: Standard Flue Kit (from £279)

|       | Price        | 5 Yr Lease pw |        | Price        | 5 Yr Lease pw |
|-------|--------------|---------------|--------|--------------|---------------|
| BSO30 | <b>£2050</b> | £10.90        | BSO85  | <b>£2580</b> | £13.72        |
| BSO40 | <b>£2150</b> | £11.44        | BSO120 | <b>£3150</b> | £16.76        |
| BSO60 | <b>£2450</b> | £13.03        |        |              |               |

**FROM**  
**£2050**  
5 Year Lease £10.90 pw



**91% HEATER EFFICIENCY**

| Model  | Nett Heat Output | Air Flow                | Swivel Heads | Consumption | Supply |
|--------|------------------|-------------------------|--------------|-------------|--------|
| BSO30  | 109,000 Btu/hr   | 2196 m <sup>3</sup> /hr | 2            | 3.43 L/hr   | 230V   |
| BSO40  | 146,440 Btu/hr   | 2556 m <sup>3</sup> /hr | 2            | 4.67 L/hr   | 230V   |
| BSO60  | 203,330 Btu/hr   | 3708 m <sup>3</sup> /hr | 2            | 6.46 L/hr   | 230V   |
| BSO85  | 280,530 Btu/hr   | 5004 m <sup>3</sup> /hr | 3            | 9.10 L/hr   | 230V   |
| BSO120 | 418,000 Btu/hr   | 7740 m <sup>3</sup> /hr | 3            | 13.30 L/hr  | 415V   |

### Stainless Steel Flue Kit for BSO Models:

Gives approx. 4.6m (15ft) ground clearance

- 3 x 1m Flue pipes, 1 x Terminal, 1 x Storm collar
- 2 x Adjustable wall fixing brackets
- 1 x Silicone rubber pipe flashing / fixing kit for profiled or corrugated roof & cladding
- Minimum flue requirement: 3 metres

| For Model   | Part No | Price       | (Additional 1m Flue Pipe) |
|-------------|---------|-------------|---------------------------|
| BSO30 & 40  | FK5     | <b>£279</b> | <b>(£36)</b>              |
| BSO60       | FK6     | <b>£289</b> | <b>(£37)</b>              |
| BSO85 & 120 | FK7     | <b>£299</b> | <b>(£39)</b>              |

**FROM**  
**£279**



## PROHEAT Oil Fired Cabinet Heater Package with Built-In Fuel Tank & Flue Kit

- Use with 28 second fuel (paraffin/kerosene) or 35 second fuel (heating oil/diesel)
- All models 240V
- Low-noise radial fan
- Large air volumes guarantee quick heating
- Equipped with thermostat
- Capacities of 30, 42, 64, 84kW net
- 4-Sided adjustable outlet opening guarantees equal air distribution
- Heat resistant steel combustion chamber & heat exchanger
- Switches & warning lights on control panel
- Summer/winter circuit for heating/ventilation

**No space for a bulk fuel tank? PROHEAT is your solution!**

|           | Price        | 5 Yr Lease pw |
|-----------|--------------|---------------|
| PROHEAT30 | <b>£1795</b> | £9.55         |
| PROHEAT40 | <b>£2050</b> | £10.90        |
| PROHEAT60 | <b>£2300</b> | £12.23        |
| PROHEAT80 | <b>£2600</b> | £13.83        |

| Model     | Nett Heat Output | Max KW | Consumption | Air Flow                 | Tank Capacity |
|-----------|------------------|--------|-------------|--------------------------|---------------|
| PROHEAT30 | 104,000 Btu/hr   | 30KW   | 3.4 L/hr    | 1,900 m <sup>3</sup> /hr | 55L           |
| PROHEAT40 | 144,000 Btu/hr   | 42KW   | 4.7 L/hr    | 2,800 m <sup>3</sup> /hr | 55L           |
| PROHEAT60 | 220,000 Btu/hr   | 64KW   | 7.2 L/hr    | 4,500 m <sup>3</sup> /hr | 75L           |
| PROHEAT80 | 286,000 Btu/hr   | 84KW   | 9.5 L/hr    | 5,300 m <sup>3</sup> /hr | 105L          |



**91% HEATER EFFICIENCY**

### Stainless Steel Flue Kit INCLUDED:

Gives approx. 5.2m (17ft) ground clearance

- 4 x 1m flue pipes & 1 x Terminal
- 2 x Adjustable wall fixing brackets
- 1 x High temperature silicone rubber roof seal & fixing kit for profiled or corrugated roof & cladding
- 1 Tee-Piece (flue to heater)
- Additional 1m flue pipe available:

| For Model       | Price      |
|-----------------|------------|
| PROHEAT30,40,60 | <b>£28</b> |
| PROHEAT80       | <b>£36</b> |

ALL Thermobile prices are supply-only, UK Mainland. Installation is available at an additional cost.

**FROM**  
**£1795**  
5 Year Lease £9.55 pw

*All the heat you need!*



# Manual Ignition Used Oil Heaters with Flue Kit

- Fast return on investment
- Efficient, virtually soot-free combustion
- Burns used oil, diesel or a combination
- Built-in fuel tank, filters & fuel pump
- Flame failure protection
- Overflow protection for burner dish
- Overheat protection (except AT306)
- Includes complete flue kit (roof seal, fitting kit & two wall bands); legislation compliant PG1/1 (04)
- AT400 & AT500 Feature a burner draw system for easier lighting and cleaning plus a heat exchanger for higher efficiency

**ONLY £1495**  
5 Year Lease £7.95 pw **AT307**



**ONLY £995**  
5 Year Lease £6.36 pw **AT306**



**ONLY £1195**  
5 Year Lease £6.36 pw

**Includes Flue Kit!**

**Includes Flue Kit!**

**Includes Flue Kit!**

**Includes Flue Kit!**



**AT400**

**ONLY £2095**  
5 Year Lease £11.14 pw



**AT500**

**ONLY £2495**  
5 Year Lease £13.27 pw

|                            | AT306                 | AT306THERMO           | AT307                 |
|----------------------------|-----------------------|-----------------------|-----------------------|
| Heat Capacity (min)        | 68,000 Btu/hr         | 68,000 Btu/hr         | 68,000 Btu/hr         |
| <b>Heat Capacity (max)</b> | <b>102,000 Btu/hr</b> | <b>102,000 Btu/hr</b> | <b>102,000 Btu/hr</b> |
| Fuel Consumption (min)     | 2 litres/hr           | 2 litres/hr           | 2 litres/hr           |
| Fuel Consumption (max)     | 3 litres/hr           | 3 litres/hr           | 3 litres/hr           |
| Fuel Tank Capacity         | 50 litres             | 50 litres             | 50 litres             |
| Fan Capacity               | Radiant Heat Only     | 1000 m³/hr            | 1000 m³/hr            |

|                                          | AT306 | AT306 THERMO | AT307 | AT400 | AT500 |
|------------------------------------------|-------|--------------|-------|-------|-------|
| Sealed Combustion Chamber                |       |              | ✓     | ✓     | ✓     |
| Burner Draw System                       |       |              |       | ✓     | ✓     |
| Overheat Protection                      |       | ✓            | ✓     | ✓     | ✓     |
| Flame Failure Protection                 | ✓     | ✓            | ✓     | ✓     | ✓     |
| Burner Pan Overflow Security             | ✓     | ✓            | ✓     | ✓     | ✓     |
| Combustion Chamber Pressure Relief Valve |       |              | ✓     | ✓     | ✓     |
| High Efficiency Heat Exchanger           |       |              |       | ✓     | ✓     |
| Outside Combustion Air Facility          |       |              | ✓     | ✓     | ✓     |

### These heaters also operate on these fuels:

- ◆ 28 Second Paraffin/Kerosene
- ◆ 35 Second Heating Oil/Diesel
- ◆ Processed Fuel Oil (PFO)
- ◆ Rapeseed, linseed & some vegetable oils




Manual ignition used oil heaters must be connected to a suitable flue system (min height of 1m above roof apex & 6m above ground level). A full range of flue accessories is available.

DEFRA\* have announced changes to permits for operating Small Waste Oil Heaters (SWOBS). For full details contact your local IFA Member or visit [www.thermobile.co.uk](http://www.thermobile.co.uk) (under News).

\*Department for Environment, Food and Rural Affairs

|                            | AT400                 | AT500                 |
|----------------------------|-----------------------|-----------------------|
| Heat Capacity (min)        | 85,000 Btu/hr         | 130,000 Btu/hr        |
| <b>Heat Capacity (max)</b> | <b>146,000 Btu/hr</b> | <b>210,000 Btu/hr</b> |
| Fuel Consumption (min)     | 2.5 litres/hr         | 3.8 litres/hr         |
| Fuel Consumption (max)     | 4.3 litres/hr         | 6.2 litres/hr         |
| Fuel Tank Capacity         | 55 litres             | 55 litres             |
| Fan Capacity               | 3000 m³/hr            | 3000 m³/hr            |

**Please note:** Used oil heaters with a perforated combustion chamber (models AT306 & AT306THERMO) are not recommended for use in workshops with explosive vapours present (i.e. petrol vapour). Models AT 307, 400 & 500 have sealed combustion chambers which can take in outside air for combustion or take air from 1.8m above ground level. Combustion Air Intake Kits for this are available. The diagrams below show the working principles of the different models:

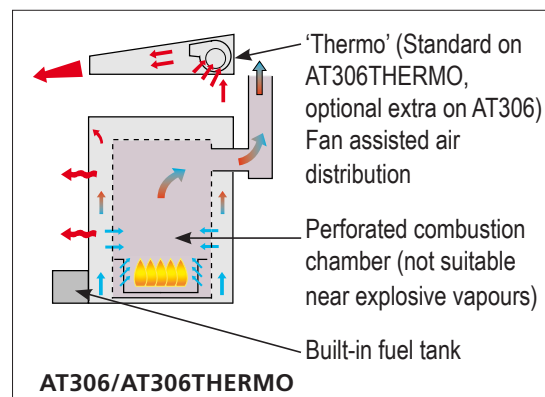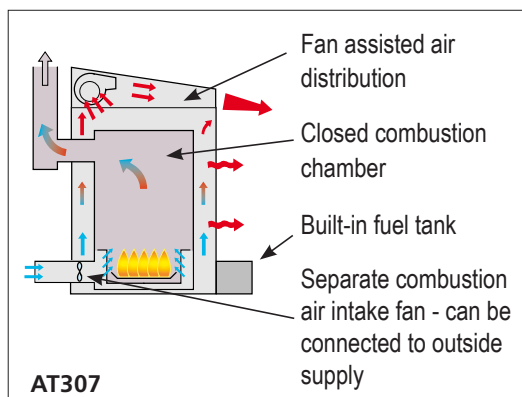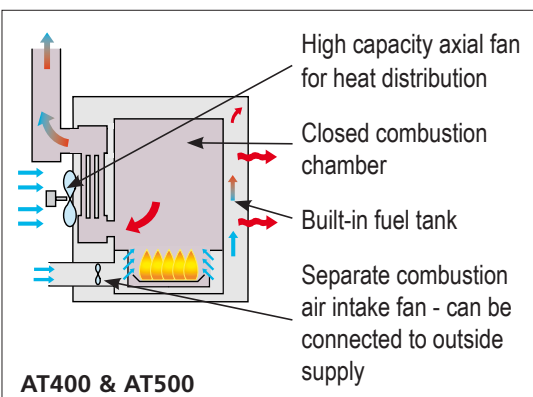

## The Original THERMOBILE

Manufacturing workshop heaters for over 50 years  
Fully trained Service Agents ♦ Comprehensive stock of spare parts  
Full range of heaters, downflow fans, dehumidifiers, etc ♦ Ask your local branch for details



Contact us - see the back cover for details



## Direct Oil Fired Space Heaters

- Very mobile, economic & highly reliable
- Robust, compact design
- High efficiency combustion
- Stainless steel combustion chamber
- Use with paraffin or diesel
- 230V

Call your local branch to order

TC15  
ONLY  
**£250**



TC25  
ONLY  
**£285**



TC40  
ONLY  
**£325**



TC45  
ONLY  
**£375**



**GREAT VALUE FOR MONEY**

Room ventilation is required

| Model | Nett Heat Output | Heated Air Flow | Consumption |
|-------|------------------|-----------------|-------------|
| TC15  | 69,000 Btu/hr    | 350 m3/hr       | 1.87 L/hr   |
| TC25  | 95,520 Btu/hr    | 400 m3/hr       | 2.51 L/hr   |
| TC40  | 122,120 Btu/hr   | 900 m3/hr       | 3.30 L/hr   |
| TC45  | 148,000 Btu/hr   | 1100 m3/hr      | 4.00 L/hr   |

\*Nett heat output is maximum & consumption approximate

## Propane Gas Fired Heaters

- Heavy duty, clean combustion, easy to maintain
- **High capacity at a low price**
- Piezo push button ignition
- Thermocouple flame protection
- Adjustable capacity regulator (except G17)
- Gas hose & gas pressure regulator
- 230V

ONLY  
**£279**



G81

ONLY  
**£239**



G57

ONLY  
**£159**



G29

**LOW PRICES!**  
Hurry while they last!

ONLY  
**£109**



G17

| Model | Nett Heat Output     | Heated Air Flow | Consumption     |
|-------|----------------------|-----------------|-----------------|
| G17   | 60,000 Btu/hr        | 500 m3/hr       | 1.25 kg/hr      |
| G29   | 65 - 100,000 Btu/hr  | 800 m3/hr       | 1.4 - 2.0 kg/hr |
| G57   | 135 - 200,000 Btu/hr | 2100 m3/hr      | 2.9 - 4.1 kg/hr |
| G81   | 180 - 270,000 Btu/hr | 2100 m3/hr      | 3.9 - 5.6 kg/hr |

\* Nett heat output is maximum & consumption approximate

Room ventilation is required

## Infra-Red Radiant Oil Fired Heaters

- Photocell flame control
- High pressure burner
- Spot heating with no air flow
- Fuel gauge
- HxWxD:  
IFT21:  
560 x 360 x 530mm  
VAL MIDI:  
810 x 660 x 710mm  
VAL6 1 STEP:  
930 x 620 x 1200mm

ONLY  
**£375**

IFT21



VAL MIDI  
ONLY  
**£1035**  
5 Year Lease £5.51 pw

Room ventilation is required

| Model       | Nett Heat Output       | Consumption | Fuel Tank |
|-------------|------------------------|-------------|-----------|
| IFT21       | 70,000 Btu/hr / 20 kW  | 1.9 L/hr    | 15 L      |
| VAL MIDI    | 112,000 Btu/hr / 33 kW | 3.1 L/hr    | 35 L      |
| VAL6 1 STEP | 140,000 Btu/hr / 40 kW | 3.7 L/hr    | 40 L      |

VAL6 1 STEP  
ONLY  
**£1235**  
5 Year Lease £6.57 pw



## Radiant Halogen Electric Heater (EH0208)

- 2 Settings, max. 3kW (10,236 Btu/hr)
- Heavy duty construction
- Quick to heat, fully portable
- Tip over & overheat safety cut-out
- Carry handle, cord storage & castors
- 220-240V
- Weight: 16kg
- HxWxD: 890 x 550 x 490mm

ONLY  
**£179**



## The Original THERMOBILE

Manufacturing workshop heaters for over 50 years

Fully trained Service Agents ♦ Comprehensive stock of spare parts

Full range of heaters, downflow fans, dehumidifiers, etc ♦ Ask your local branch for details

ALL Thermobile prices are supply-only, UK Mainland. Installation is available at an additional cost.

**THERMOBILE**  
UK LIMITED